


LUBING

GREENTEC

PUMP STATIONS FOR FOGGING-SYSTEMS

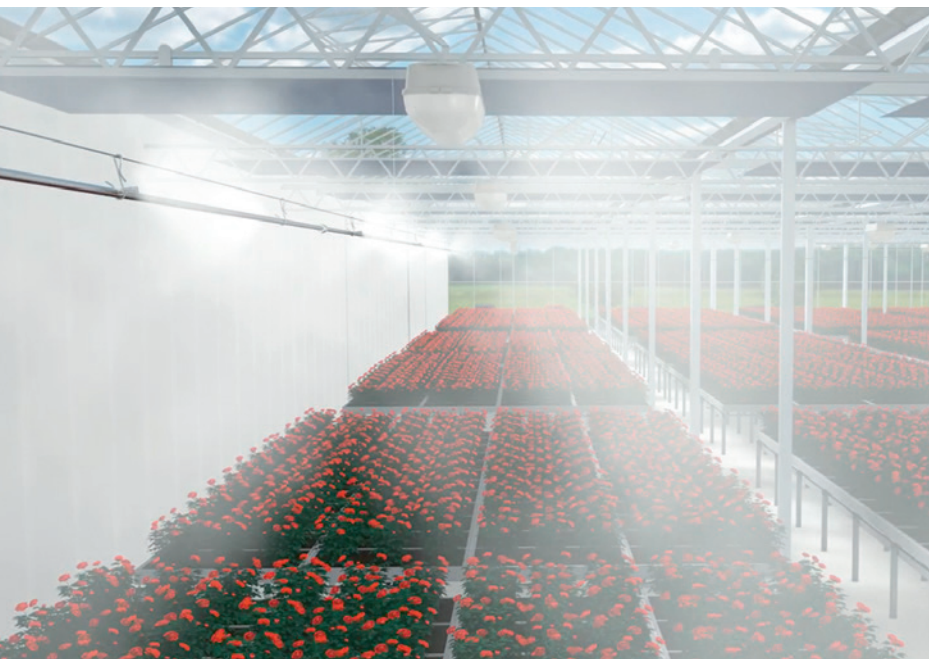

ADVANTAGES OF THE PUMP STATIONS

LUBING GreenTec pump stations for fogging systems are modularly designed so that they can be optimally adapted to the customer's requirements. With the intuitive touch screen control you have everything at a glance.

- variable stainless steel construction
- up to 8 pump units per pump station possible
- with 3 different pump sizes freely selectable
- variable pressure up to 100 bar
- pumps with variable speed
- flow rates up to 600 l/min suitable for greenhouses up to 10 ha
- motor mounted frequency controller for optimal ventilation
- uncompromising quality and reliability



SYSTEM COMPONENTS



Pump unit

- 3 different pump sizes are available for each pump unit
- Pump unit in modular design



Touch Controller

- interactive controller for control and monitoring of the entire pump station
- easy operation via touch screen



Filter unit


- clear arrangement and easily accessible for maintenance work
- central filter unit for particle-free water



Valve

- Solenoid valve for separate control of individual areas.
- easy installation - also on existing systems

MODULAR STRUCTURE

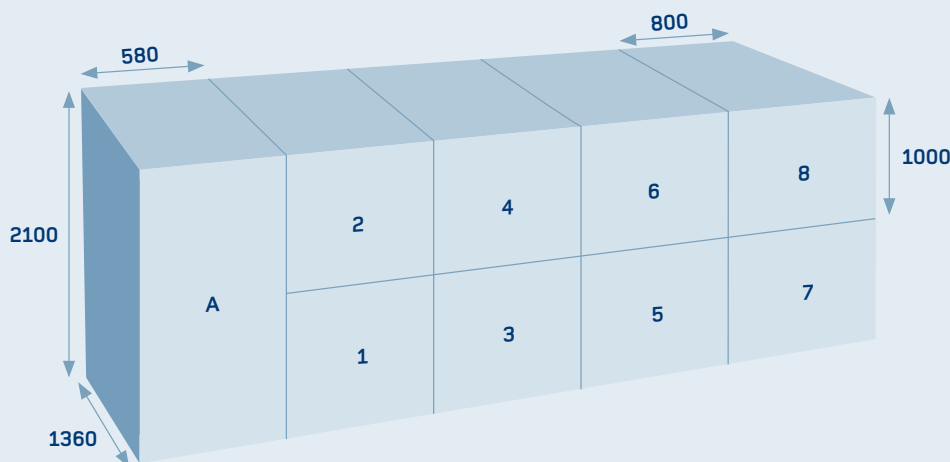

A system consists of:

A: Basic set with pressure booster system, controller and filter

1 - 8: Pump units

LUBING
GREENTEC

Further information under
WWW.LUBING-GREENTEC.COM

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf

☎ +49(0)54 42 - 9879-0

☎ +49(0)54 42 - 9879-33

www.lubing-greentec.com · info@lubing-greentec.com

0851-1/23-05 · Subject to technical changes.