


LUBING[🌱]
GREENTEC

**FOGGING-SYSTEMS
FOR
GREENHOUSES**

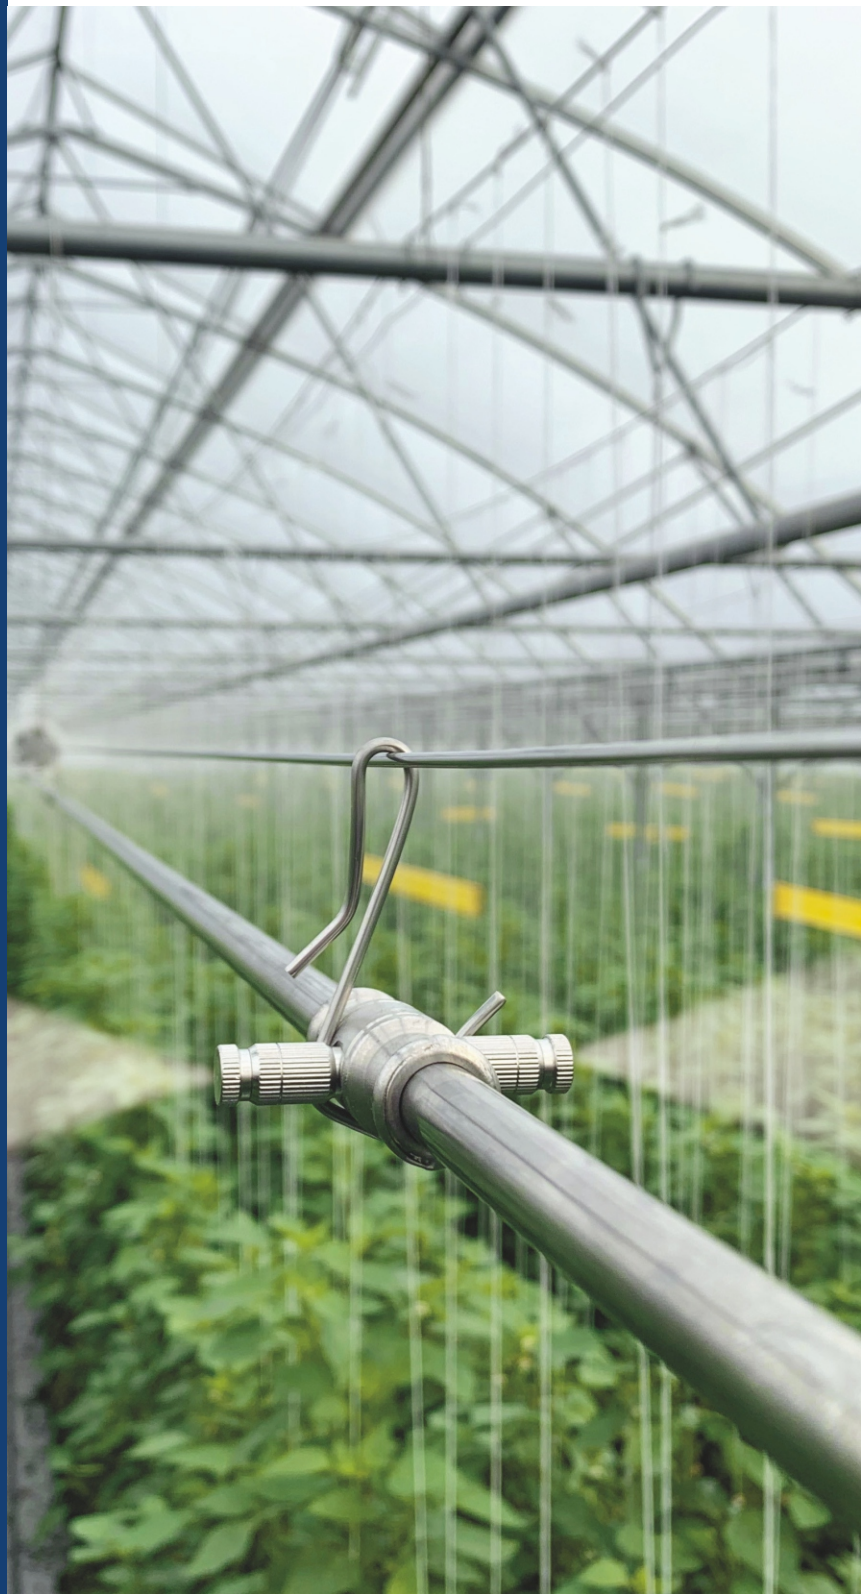

THE PERFECT HUMIDITY

The LUBING GREENTEC Fogging-System provides efficient cooling and humidification for greenhouses. With 70 bar high pressure, ultra-fine mist droplets, and a modular system architecture, it creates stable climate conditions and supports optimal plant growth – precise, reliable, and easy to install.

SYSTEM COMPONENTS



PUMP UNIT – D-LINE

- » Direct drive
- » Supplies multiple areas with one pump unit




TOUCH CONTROLLER

- » Interactive control and monitoring
- » Easy operation via touchscreen



FILTER UNIT

- » Central filtration for particle-free water
- » Easy filter exchange



NOZZLE LINE

- » 6-m stainless steel pipe with welded adapter and high-pressure nozzle
- » Alternatively with Pressfix nozzle adapter



VALVES

- » Solenoid valves for separate activation of individual zones
- » Easy installation, also in existing systems

MAXIMUM COOLING PERFORMANCE

Starting temperature	36°C	36°C	36°C	36°C
Starting humidity	10%	30%	50%	70%
Final temperature	18°C	24°C	29°C	33°C
Final humidity	85%	85%	85%	85%
Cooling performance	18°C	12°C	7°C	3°C

PUMP TYPE FLOW RATE

Liters per minute	2	5	12	21	30	38	70
Maximum nozzles	20	60	140	250	350	400	800

➤ ADVANTAGES

- » Ultra-fine mist: droplet size only 5 µm for rapid evaporation
- » Uniform cooling without wetting
- » Reduced irrigation demand
- » Higher yields through stable humidity levels
- » Easy installation and expansion
- » Separate control of individual greenhouse areas
- » High reliability and long service life
- » One pump unit can supply multiple zones

LUBING
GREENTEC

LUBING Maschinenfabrik GmbH & Co. KG
Lubingstraße 6 | 49406 Barnstorf
Germany

T +49 (0) 54 42 98 79 - 0
F +49 (0) 54 42 98 79 - 33
M info@lubing-greentec.com

LUBING-GREENTEC.COM

Status: 03 / 2026 | Technical changes, further developments and improvements reserved.

0847-1